

Installation and size

Technical parameters


Current and Voltage : 32A 240V AC

Signal current : 2A <30V DV

Protection Degree : IP54

Cable specification

Function	32A 240V AC
L1 (1)	6 mm ² Brown
L2 (2)	
L3 (3)	
N (4)	6 mm ² Blue
PE (5)	6 mm ² Olivine
CP (6)	0.5 mm ² Orange
PP (7)	0.5 mm ² White

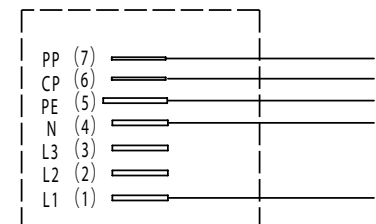

Charging cable 32A 1P+N+PE+PP+CP

The socket ,was designed according to the standard of 62196-2 IEC 2010 sheet 2-1lf

Charging cable 3000/5000mm 3*6mm²+2*0.5mm²



DSIEC2f-EV32S-NC

DSIEC2f-EV32S-3C

DSIEC2f-EV32S-5C



www.evconnectors.com

tel: +44 (0)1371 811230